



NPEXA-H2D11

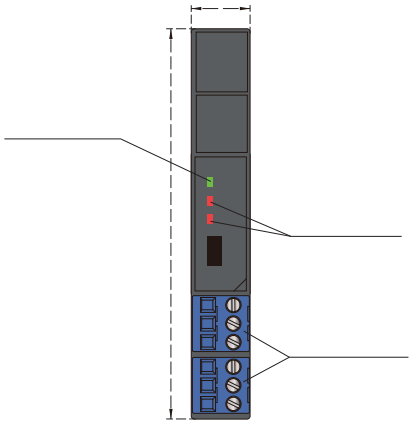

Technical data

- ≤ 20 Ω per line (RTD)
- ≤ 500 Ω
- 0.01%F.S./
- ≤ 1s
- ≥ 2500 V AC (intrinsically safe side /
- ≥ 500 V AC (Power supply side /
- ≥ 100 MΩ (Input /Output/Power supply)

Wiring diagram

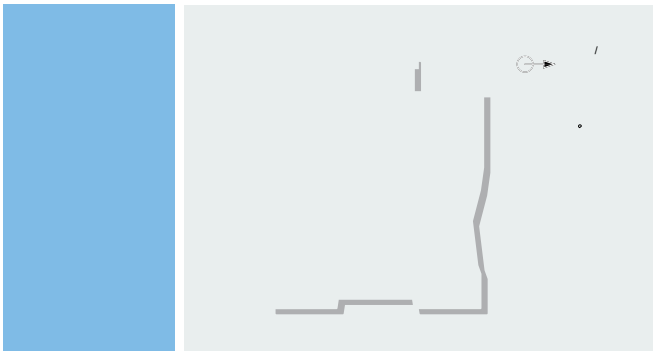

Explosive-proof parameters

- Co=12μF
- Co=151μF
- Co=700μF

Model rules