

→ 简介

DCS PLC

→ 技术参数

防爆等级: [Ex ia Ga] IIB

供电电源:

(9+ 10-)  
18V DC ~ 60V DC ( 24V DC)

输入 (5 6 7 8):

输出 (1 2 3 4):

158 Ω  
> 12 V  
≤ 60 mA  
22 V DC

响应时间: < 20 ms

电磁兼容: EMC IEC 61326-3-1

介电强度 (漏电流1mA 测试时间1分钟):

≥ 3000 V AC ( / )  
≥ 1500 V AC ( / )

绝缘电阻: ≥ 100 MΩ ( / / )

国家级仪器仪表防爆安全监督检验站认证参数:



U<sub>m</sub> 250 V  
1 2 3 4  
U<sub>o</sub> 25.2V I<sub>o</sub> 170mA P<sub>o</sub> 1080mW C<sub>o</sub> 0.82μF L<sub>o</sub> 4mH

环境条件:

-20 °C ~ +60 °C  
10 %RH ~ 90 %RH (40 °C)  
80 kPa ~ 106 kPa  
-40 °C ~ +80 °C

外形规格: 12.8mm×110mm×117mm

防护等级:

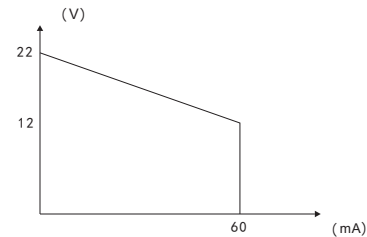

60mA

C



Nanjing New Power Electric Technology Co., Ltd.

Y% + 1"PF #,Uw% ` ,8%Wr1 (

<b>BUS</b>	
	Max. 8A
(UL/IEC)	1.6kV
	-40°C~+105°C